


## ENTRANCE MATTING SYSTEM CLEAN SYSTEM RUBBER

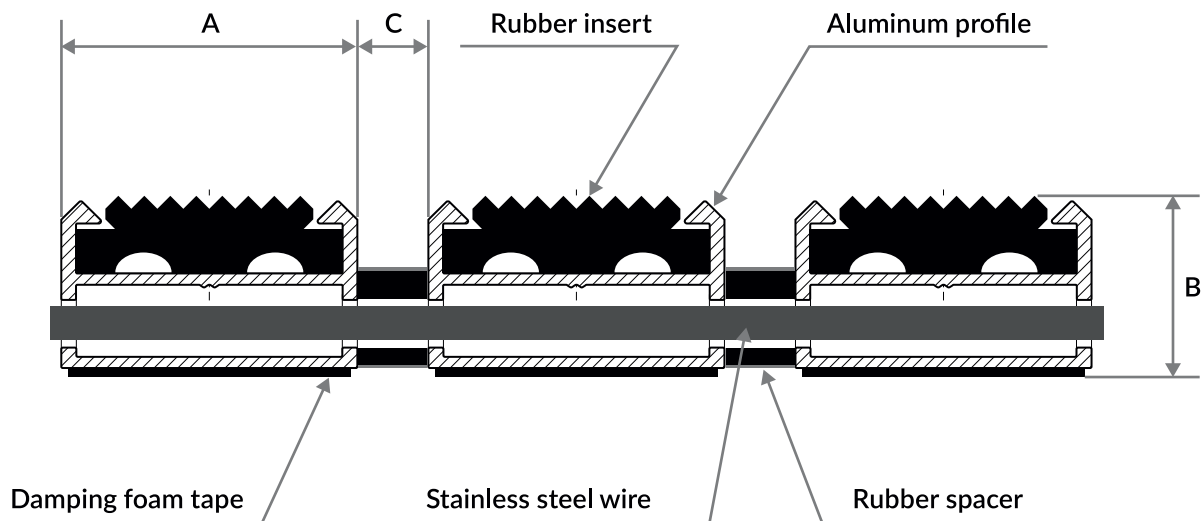

	A [mm]	B [mm]	C [mm]
Clean System Rubber 12	30	14	3 – 5
Clean System Rubber 17	30	18	3 – 5
Clean System Rubber 22	30	22	3 – 5
Clean System Rubber 27	31	27	3 – 5
Clean System Rubber 22 Strong	32	22	3 – 5
Clean System Rubber 27	51	22	3 – 5

### ■ PRODUCT SPECIFICATION:

Doormats Clean System Rubber are made of aluminum with Rubber insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat. Under aluminum profile is dumping tape.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

## Clean System Rubber

Hygienic Certificate, HK/B/0628/01/2014

Anti-slip norm according to DIN 51130:2014 R12

Fire classification according to PN-EN 13501-1+A1:2010 C<sub>fl</sub> - s1

Material of aluminum profile EN AW 6063 T6

Stationary load 3 500 kg/100 cm<sup>2</sup> - standard version  
10 400 kg/100 cm<sup>2</sup> - strong version

## Rubber Insert

Material Insert is made of elastomer with pigments  
(G-grey, B-brown, B-black)

Density 1,18 g/cm<sup>3</sup>

Hardness 70±3 ShA

Tensile strength >6 MPa