


FACILITY FOOTWEAR CLEANER SYSTEM CLEAN SYSTEM RUBBER PLUS

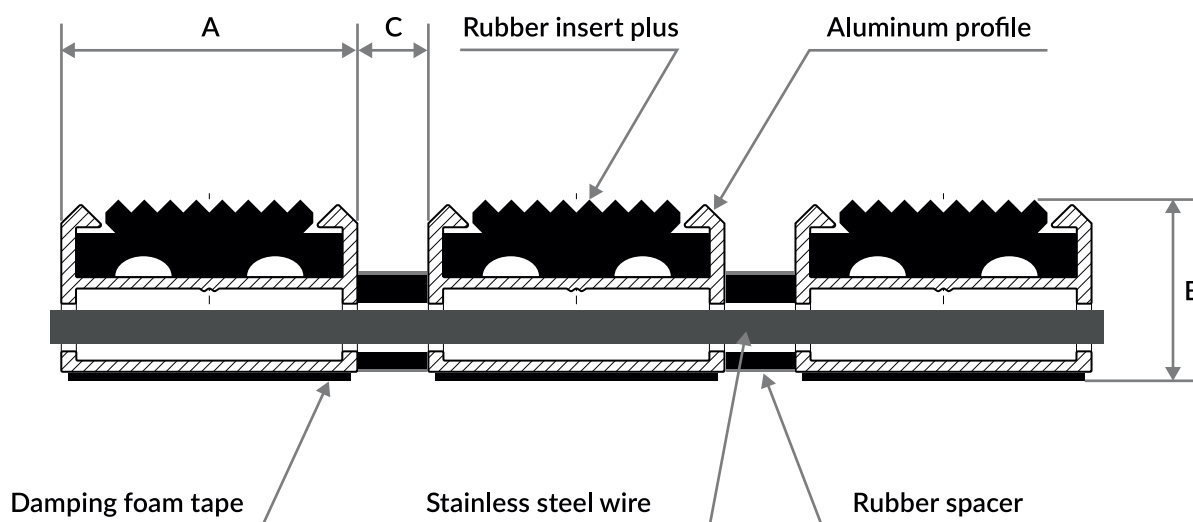

	A [mm]	B [mm]	C [mm]
Clean System Rubber 12	30	14	3 – 6,5
Clean System Rubber 17	30	18	3 – 6,5
Clean System Rubber 22	30	22	3 – 6,5
Clean System Rubber 27	31	27	3 – 6,5
Clean System Rubber 22 Premium	32	22	3 – 6,5

■ PRODUCT SPECIFICATION:

The Clean System Rubber Plus cleaners are made of aluminium profiles with a rubber insert. The profiles are connected using a stainless steel cable. Individual profiles are separated by rubber spacers. Thanks to its design, the mat can be easily rolled for cleaning and transport.

The mats are manufactured in different heights. i.e. 12 mm, 17 mm, 22 mm and 27 mm.

Depending on the available options, the spacers between the profiles may vary between 3 and 6.5 mm.

The mats can be made in any size and shape thanks to their design. The width of the mat is the result of cutting the profiles, while its length is obtained by choosing the number of profiles and compressing the rubber spacers between them.

The limit is the weight of a single mat, which should not exceed 100 kgs.

According to the Building Research Institute, the Clean System Facility Footwear Cleaner System is not a construction product. Accordingly, it is not subject to the requirements of the “Regulation of the Minister of Infrastructure on Technical Conditions For Buildings and their Location” applicable to construction products.

Clean System Rubber Plus

Hygienic Certificate	B-BK-60211-0449/19
Anti-slip norm according to DIN 51130:2014	R12
Fire classification according to PN-EN 13501-1+A1:2010	C _{fl} - s1
Declaration of performance	CE
Material of aluminum profile	EN AW 6063 T6
Stationary load	3 500 kg/100 cm ² - standard version 10 000 kg/100 cm ² - strong version
Environmental management system certificate	ISO 14001:2015
Rubber Insert	
Material of the insert	EPDM
Density	1,37 g/cm ³
Hardness	85±3 ShA
Tensile strength	>23 MPa