


ALUMINUM ENTRANCE MATS CLEAN SYSTEM RUBBER WIDE

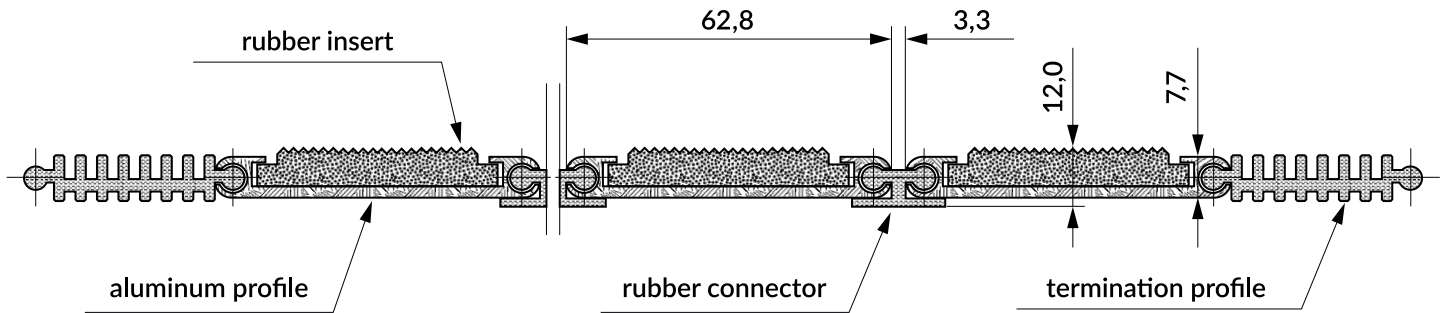

■ PRODUCT SPECIFICATION:

Doormats are manufactured from aluminum profiles with rubber inserts. The profiles are joined together using a rubber connector, which also serves as a shock absorber between the mat and the floor surface or recess. The design allows for easy rolling of the mat for cleaning and transportation.

The aluminum profile of the Clean System Wide mat has a height of 7.7 mm. The height of the profile with the rubber insert is 12 mm. The mat's design allows for customization in various dimensions and shapes. The width of the mat is achieved by cutting the profiles, while its length is determined by the selection of the number of profiles and cutting of the end profiles. The weight limit for a single mat should not exceed 50 kg.

According to the opinion of the Institute of Building Technology, the object doormat system Clean System is not a building product and therefore is not subject to the requirements of the "Regulation of the Minister of Infrastructure on the technical conditions to be met by buildings and their location" regarding building products.

Clean System Rubber Wide

Hygienic certificate	HK/B/0628/01/2014
Anti-slip property designation according to DIN 51130:2014-02	R12
Fire reaction classification according to PN-EN 13501-1+A1:2010	C _{fl} - s1
Profile material	EN AW 6063 T6
Non-destructive static load of aluminum profile	6 000 kg/100 cm ²
Rubber insert	
Insert material	SEBS
Density	1,18 g/cm ³
Hardness	70±3 ShA
Tensile strength	>6MPa