


## CLEAN SYSTEM RYPS/RUBBER/SCRUB FACILITY DOOR MAT SYSTEM ATF (ALUMINIUM TACTILE FLOORING)

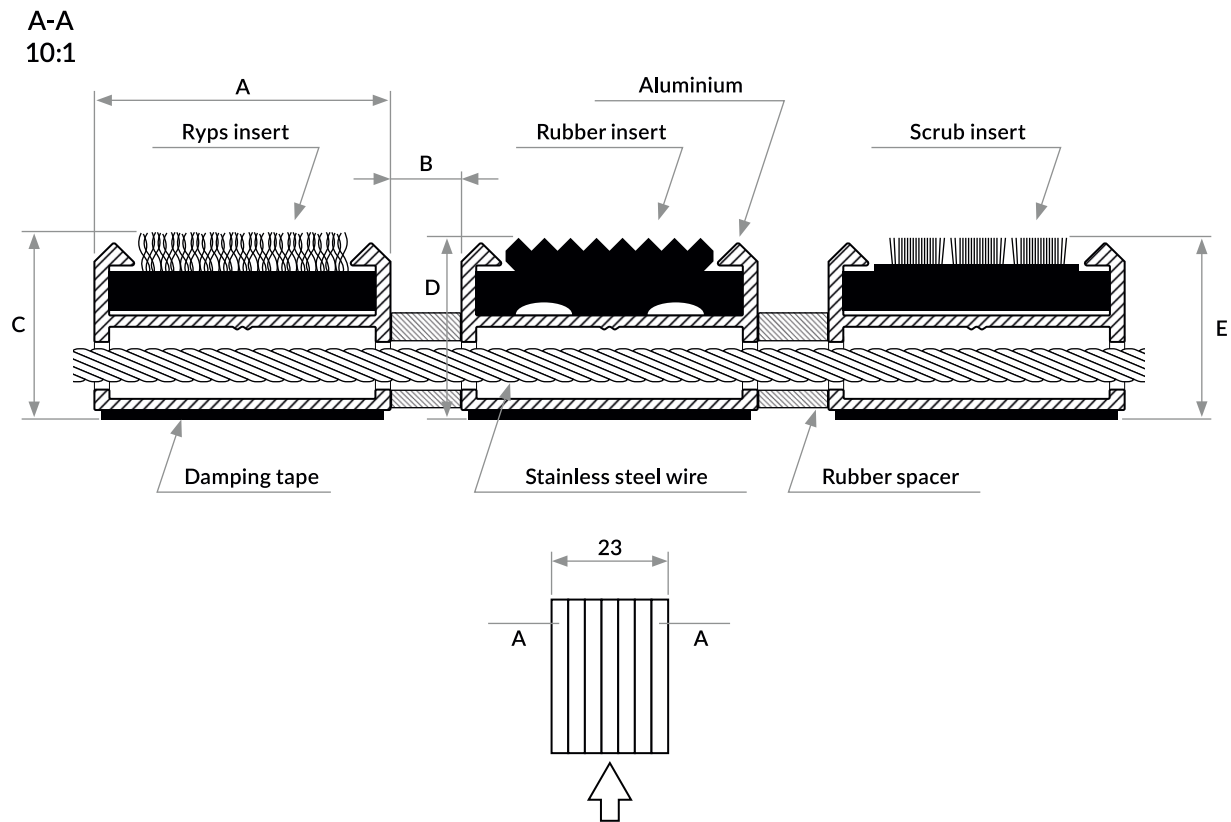

Nominal height of the insert	A [mm]	B [mm]	Ryps C [mm]	Rubber D [mm]	Scrub E [mm]
Clean System Ryps/Rubber/Scrub 12	30	3-5	15	15	18
Clean System Ryps/Rubber/Scrub 17	30	3-5	18	18	22
Clean System Ryps/Rubber/Scrub 22	30	3-5	22	22	25
Clean System Ryps/Rubber/Scrub 27	30	3-5	28	28	32

### ■ PRODUCT SPECIFICATION:

**Clean System Ryps / Rubber / Brush ATF doormats are used in pedestrian areas as elements that facilitate the movement of blind or visually impaired people.**

They are made of alternately arranged aluminium profiles of different heights. **The standard product is 23 cm long and consists of 7 profiles that can be filled with ryps, rubber or scrub inserts.** Additionally, an insert in contrasting colour (e.g. white) can be used, which will facilitate orientation for the visually impaired.

The profiles are connected by means of a stainless steel wire and separated by rubber spacers. The spacing between the profiles can be from 3 mm to 4.5 mm. **The product is available in three nominal heights: 12/17, 17/22 and 22/27 mm.** The width of the mat is arbitrary, because it is obtained by cutting the profiles.

According to the opinion of the Building Research Institute, the Clean System object door mat for is not a construction product and hence is not subject to the requirements of the "Regulation of the Minister of Infrastructure on technical conditions to be met by buildings and their locations"; regarding construction products.

ATF	
Hygienic certificate	HK/B/0628/01/2014
Determination of the anti-slip property according to DIN 51130:2014	R11/R12/R13
Reaction to fire classification according to PN-EN 13501-1+A1:2010	C <sub>fl</sub> - s1
Profile material	EN AW 6063 T6
Static load	1 750 kg/100 cm <sup>2</sup>
Rubber Insert	
Insert material	SEBS
Density	1,18 g/cm <sup>3</sup>
Hardness	70±3 ShA
Tensile strength	>6 MPa
Ryps Insert	
Manufacturing process	felting
Bristle composition	100% PP ISO 2424
Bristle weight	1180 g/m <sup>2</sup>
Total weight	3630 g/m <sup>2</sup> +/- 15% ISO 8543
Bristle height	4 mm ISO 1765
Total thickness	9,5 mm +15%/-10% ISO 1765
Scrub Insert	
PA6.6 fibre with the thickness of	0,4 mm
Base profile material	PP
Stainless steel wire with the thickness of	0,7 mm
According to the manufacturer's declaration, the scrub insert meets the requirements of the EU directive 2002/95/EC, which entered into force on 1 July 2006, and is manufactured in accordance with the ROHS 2002/95/EC directive.	