


ENTRANCE MATTING SYSTEM CLEAN SYSTEM RYPS/RUBBER

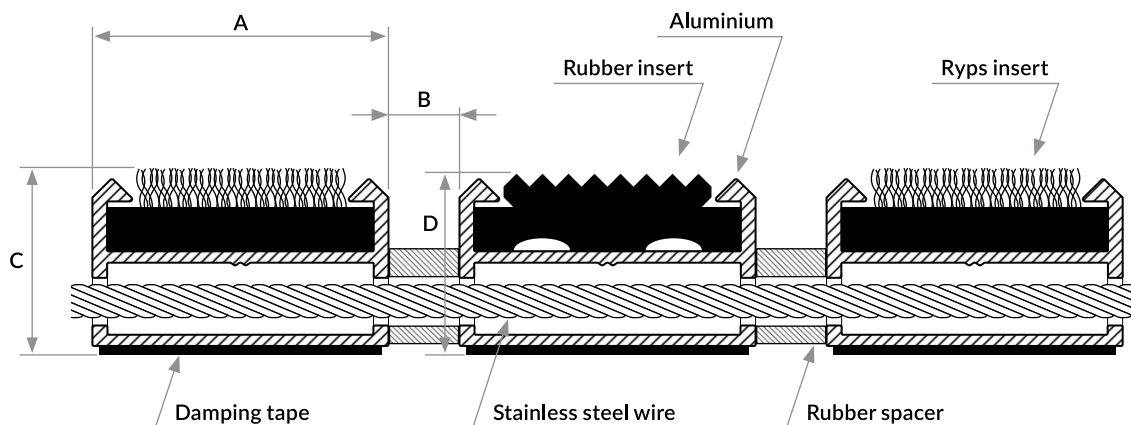

	A [mm]	B [mm]	Ryps C [mm]	Rubber D [mm]
Clean System Ryps/Rubber 12	30	3-5	15	15
Clean System Ryps/Rubber 17	30	3-5	18	18
Clean System Ryps/Rubber 22	30	3-5	22	22
Clean System Ryps/Rubber 27	30	3-5	28	28
Clean System Ryps/Rubber 22 Strong	32	3-5	22	22
Clean System Ryps/Rubber 22 Premium	51	3-5	22	22

■ PRODUCT SPECIFICATION:

Doormats Clean System Ryps/Rubber are made of aluminum with Rubber and Ryps insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat. Under aluminum profile is dumping tape.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

Hygienic certificate		HK/B/0628/01/2014
Determination of the anti-slip property according to DIN 51130:2014		R11/R12
Reaction to fire classification according to PN-EN 13501-1+A1:2010		C _{fl} - s1
Profile material		EN AW 6063 T6
Static load		3 500 kg/100 cm ² - standard version 10 000 kg/100 cm ² - strong version
Rubber Insert		
Insert material		SEBS
Density		1,18 g/cm ³
Hardness		70±3 ShA
Tensile strength		>6 MPa
Textile insert		
Manufacturing process		felting
Fiber composition		100% polypropylene (PP) ISO 2424
Fiber weight		1 180 g/m ²
Fiber height		4 mm ISO 1765
Total mass		3 630 g/m ² +/- 15% ISO 8543
Total thickness		9,5 mm + 15%/-10% ISO 1765
Material permanently antistatic		ISO 6356