


ALUMINUM ENTRANCE MATS CLEAN SYSTEM RYPS PLUS CLOSED CONSTRUCTION

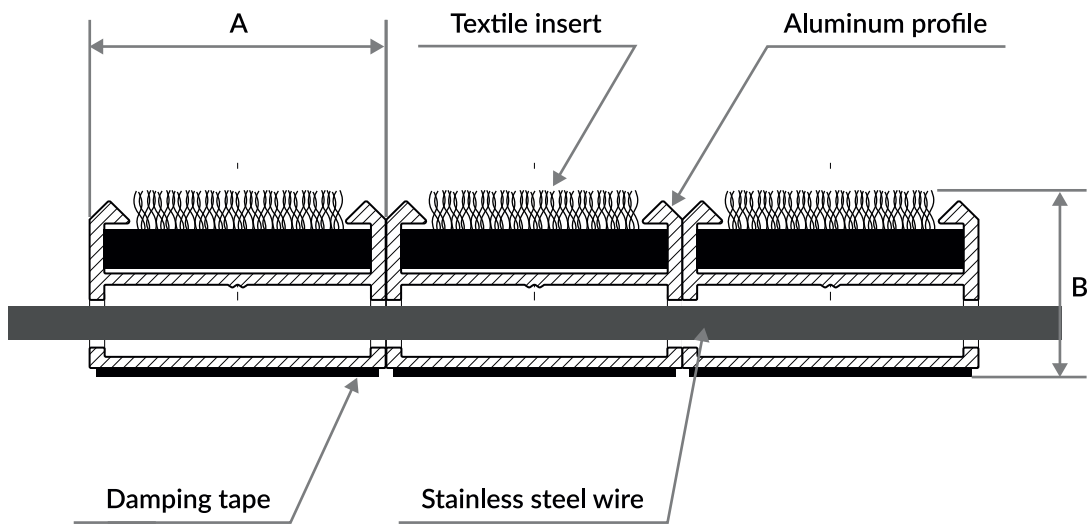

	A [mm]	B [mm]
Clean System Ryps Plus 12	30	15
Clean System Ryps Plus 17	30	18
Clean System Ryps Plus 22	30	22
Clean System Ryps Plus 27	30	28
Clean System Ryps Plus 22 Strong	32	22
Clean System Ryps Plus 22 Premium	51	22

■ PRODUCT SPECIFICATION:

Mats are manufactured from aluminum profiles with a polyamide ryps insert. Profiles are joined using stainless steel links. The construction of mats without spacers does not allow them to be rolled for transportation. A damping tape is adhered to the bottom of the mat.

Mats are produced in heights: 12 mm, 17 mm, 22 mm, and 27 mm. The mat construction allows for mats to be made in any dimensions and shapes, where the width of the mat is obtained by cutting the profiles, while its length is a multiple of the width of the profile (dimension A). The limit is the weight of a single mat, which should not exceed 100 kg.

According to the opinion of the Building Technology Institute, the Clean System object shoe wiping system is not a construction product and therefore is not subject to the requirements of the "Regulation of the Minister of Infrastructure on the technical conditions to be met by buildings and their location" regarding construction products.

Clean System Ryps Plus Closed Construction

Hygienic certificate	HK/B/0628/01/2014
Anti-slip property designation according to DIN 51130:2014	R11
Fire reaction classification according to PN-EN 13501-1+A1:2010	C _{fl} - s1
Profile material	EN AW 6063 T6
Non-destructive static load on aluminum profile	3 500 kg/100 cm ² - standard 10 000 kg/100 cm ² - strong
Textile insert	
Manufacturing process	tufted
Fiber composition	100% polyamide (Pa6)
Fiber weight	850 g/m ² +/- 10%
Fiber height	4 mm +/- 10%
Total mass	3 460 g/m ² +/- 10%
Total thickness	7,5 mm + 15%/- 10%
Electrostatic charge	< 2 kV ISO 6356